



## Laser Diode ZBD-LD-455-5500M

ZBD-LD-455-5500M is a multimode laser diode with 5.5W CW output power at 455nm. It is supplied in a 9mm floating mounted TO can with Zener Diode. The laser diode is suitable for opto-electronic applications.

### ■ Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Forward Current (Tc=25°C)	I <sub>f</sub>	3.5	A
Reverse Current (Tc=25°C)	I <sub>r</sub> (LD)	85	mA
Storage Temperature	T <sub>stg</sub>	-40~85	°C
Operating Case Temperature	T <sub>c</sub>	0~70	°C

### ■ Initial Electrical/Optical Characteristics (Tc=25°C)


Parameter	Symbol	Condition	Min	Typ.	Max	Unit	
Optical Output Power	P <sub>o</sub>	I <sub>f</sub> = 3.0A	-	(5.5)	-	W	
Dominant Wavelength	λ <sub>d</sub>	I <sub>f</sub> = 3.0A	448	(455)	462	nm	
Threshold Current	I <sub>th</sub>	CW	240	-	440	mA	
Slope Efficiency	η	CW	-	(2.0)	-	W/A	
Operating Voltage	V <sub>op</sub>	I <sub>f</sub> = 3.0A	3.5	-	4.7	V	
Beam Divergence*	Parallel	θ <sub>//</sub>	I <sub>f</sub> = 3.0A	8	(11)	14	°
	Perpendicular	θ <sub>⊥</sub>	I <sub>f</sub> = 3.0A	40	(46)	52	°

( ) are reference figures.


\* Full angle at 1/e<sup>2</sup> from peak intensity



## Outline Dimension

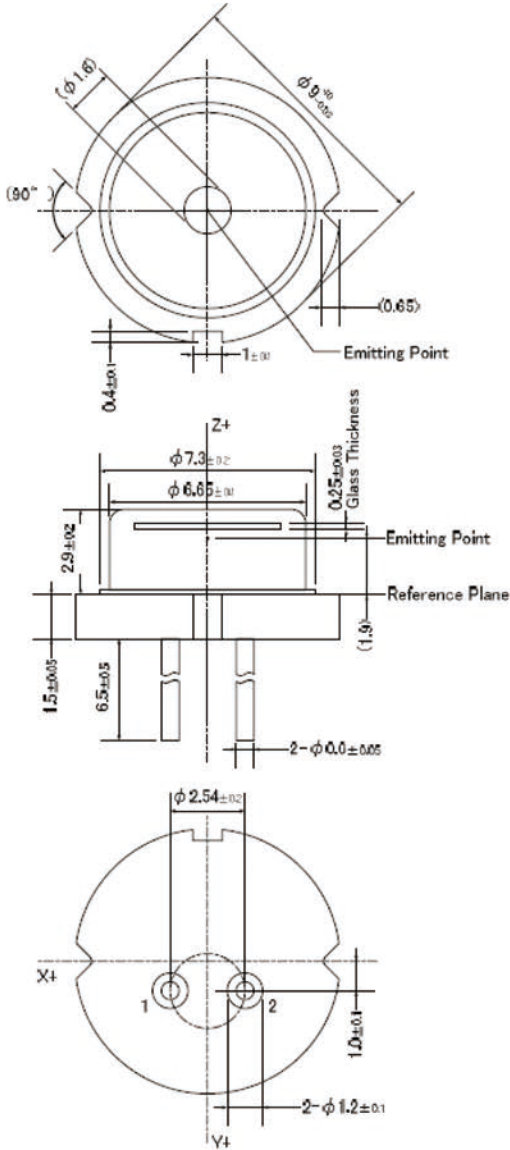

## Connection



1. LD Anode  
2. LD Cathode

Figures in ( ) are reference purpose only.

Parts	Materials
Stem	Cu + Fe + Ni plating + Au plating
Lead	Ni-Fe-Co alloys + Ni plating + Au plating
Cap	Ni-Fe alloys + Ni plating
Glass	Borosilicate glass
Chip	Gallium nitride
Sub mount	Silicon carbide
Zener Diode	Silicon